


K22-TYPE

Planetary GEARHEAD

DIMENSIONS

K22-2418 BLDC SERIES

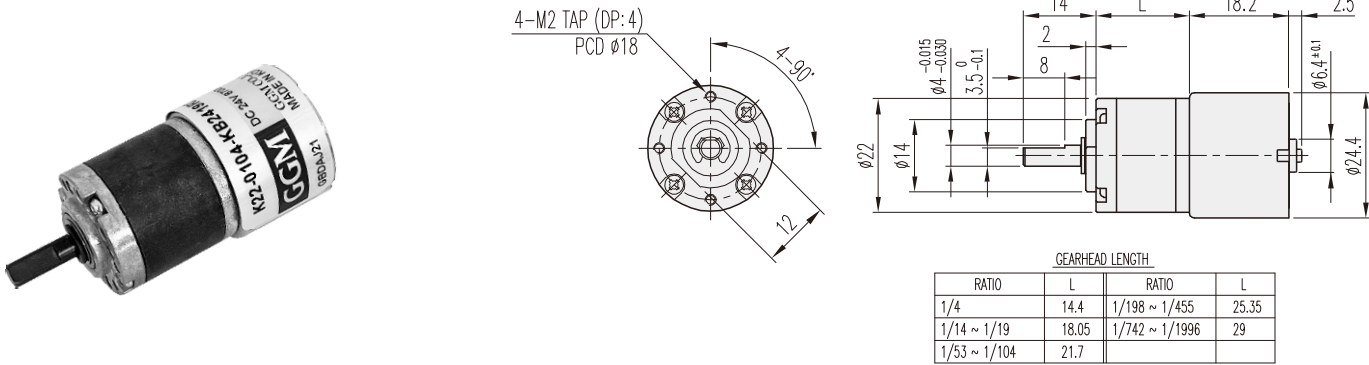

BLDC MOTOR PERFORMANCE DATA

MODEL	ITEM	VOLTAGE (DC)	NO LOAD		AT MAX. EFF.			WEIGHT (g)
			mA	rpm	gf-cm	mA	rpm	
KB2418U1		12V	120	6200	25	250	4500	30
KB2418R2		24V	100	8700	18	150	7200	

AT MAXIMUM EFFICIENCY (K22-□□□□-KB2418□□)

GEAR MODEL	KB2418U1 DC 12V		KB2418R2 DC 24V	
	rpm	kgf-cm	rpm	kgf-cm
1/0004	1125	0.09	1800	0.06
1/0014	321	0.29	514	0.2
1/0016	281	0.33	450	0.23
1/0019	237	0.39	379	0.27
1/0053	85	1	136	0.68
1/0062	73	1.1	116	0.8
1/0072	63	1.3	100	0.93
1/0084	54	1.6	86	1.1
1/0104	43	1.9	69	1.3
1/0198	22.7	3	36	2.3
1/0231	19.5	3	31	2.7
1/0270	16.7	3	26.7	3
1/0316	14.2	3	22.8	3
1/0370	12.1	3	19.5	3
1/0455	9.9	3	15.8	3
1/0742	6	3	9.7	3
1/1014	4.4	3	7.1	3
1/1249	3.6	3	5.7	3
1/1621	2.8	3	4.4	3
1/1996	2.3	3	3.6	3

- * Gearbox output shaft rotation direction is same direction with motor.
- * Proceed function change in motor stop type.
- * Controller for speed control is GUN type.

How to connect when speed control is not needed.

No - Color	Pin - Contents	Connection Method
1 - Black	GND	Connect GND and PWM to (-) power simultaneously
2 - Red	12V	Connecting to (+) power
3 - Yellow	1FG (9P / R)	9 pulses per rotation
4 - White	PWM	Connect GND and PWM to (-) power simultaneously
5 - Orange	CW/CCW	Default CCW rotation, CW rotation on (-) connection

* Please be cautious that Motor can be damaged when connected to incorrect power (+) (-).

