


## KG5-TYPE

### DIMENSIONS

#### KG5-3429 SERIES

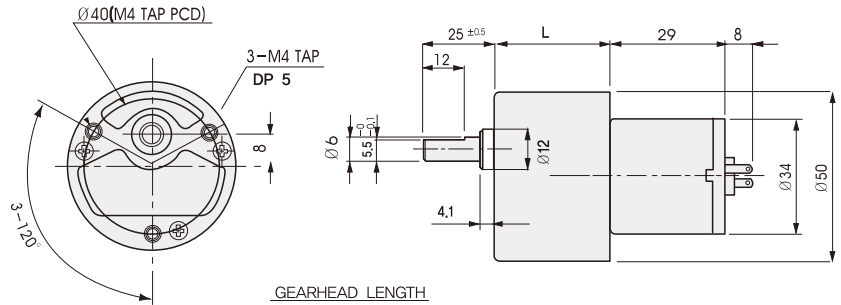

GEARHEAD LENGTH

RATIO	L
1/003~1/120	34
1/150~1/3240	46

#### AT MAXIMUM EFFICIENCY (KG5-□□□□-KD3429□□)

GEAR	MODEL	KD3429S1		KD3429S2		KD3429T1		KD3429T2		KD3429P1		KD3429P2	
		DC 12V		DC 24V		DC 12V		DC 24V		DC 12V		DC 24V	
		rpm	kgf-cm	rpm	kgf-cm	rpm	kgf-cm	rpm	kgf-cm	rpm	kgf-cm	rpm	kgf-cm
1/003		1500	0.1	1500	0.1	2167	0.1	2167	0.1	2667	0.2	2667	0.1
1/005		900	0.16	900	0.16	1300	0.16	1300	0.16	1600	0.3	1600	0.16
1/010		450	0.3	450	0.3	650	0.3	650	0.3	800	0.65	800	0.3
1/015		300	0.44	300	0.44	433	0.44	433	0.44	533	0.87	533	0.44
1/020		225	0.58	225	0.58	325	0.58	325	0.58	400	1.2	400	0.58
1/025		180	0.73	180	0.73	260	0.73	260	0.73	320	1.5	320	0.73
1/030		150	0.87	150	0.87	217	0.87	217	0.87	267	1.75	267	0.87
1/040		112.5	1.2	112.5	1.2	162.5	1.2	162.5	1.2	200	2.3	200	1.2
1/050		90	1.3	90	1.3	130	1.3	130	1.3	160	2.6	160	1.3
1/060		75	1.6	75	1.6	108	1.6	108	1.6	133	3.1	133	1.6
1/075		60	2	60	2	87	2	87	2	107	3.9	107	2
1/090		50	2.4	50	2.4	72	2.4	72	2.4	88.9	4.7	88.9	2.4
1/100		45	2.6	45	2.6	65	2.6	65	2.6	80	5.2	80	2.6
1/120		37.5	3.1	37.5	3.1	54.2	3.1	54.2	3.1	66.7	6.3	66.7	3.1
1/150		30	3.5	30	3.5	43.3	3.5	43.3	3.5	53.3	7	53.3	3.5
1/160		28.1	3.8	28.1	3.8	40.6	3.8	40.6	3.8	50	7.5	50	3.8
1/180		25	4.2	25	4.2	36.1	4.2	36.1	4.2	44.4	8.5	44.4	4.2
1/200		22.5	4.7	22.5	4.7	32.5	4.7	32.5	4.7	40	9.4	40	4.7
1/210		21.4	5	21.4	5	31	5	31	5	38.1	9.9	38.1	5
1/240		18.8	5.7	18.8	5.7	27	5.7	27	5.7	33.3	10	33.3	5.7
1/270		16.7	6.4	16.7	6.4	24	6.4	24	6.4	29.6	10	29.6	6.4
1/300		15	7.1	15	7.1	21.7	7.1	21.7	7.1	26.7	10	26.7	7.1
1/360		12.5	8.5	12.5	8.5	18	8.5	18	8.5	22.2	10	22.2	8.5
1/400		11.3	8.5	11.3	8.5	16.3	8.5	16.3	8.5	20	10	20	8.5
1/500		9	10	9	10	13	10	13	10	16	10	16	10
1/600		7.5	10	7.5	10	10.8	10	10.8	10	13.3	10	13.3	10
1/750		6	10	6	10	8.7	10	8.7	10	10.7	10	10.7	10
1/900		5	10	5	10	7.2	10	7.2	10	8.9	10	8.9	10
1/1080		4.2	10	4.2	10	6	10	6	10	7.4	10	7.4	10
1/1250		3.6	10	3.6	10	5.2	10	5.2	10	6.4	10	6.4	10
1/1500		3	10	3	10	4.3	10	4.3	10	5.3	10	5.3	10
1/1800		2.5	10	2.5	10	3.6	10	3.6	10	4.4	10	4.4	10
1/2250		2	10	2	10	2.9	10	2.9	10	3.6	10	3.6	10
1/2700		1.7	10	1.7	10	2.4	10	2.4	10	3	10	3	10
1/3240		1.4	10	1.4	10	2	10	2	10	2.5	10	2.5	10

\*   색상의 감속비는 MOTOR와 출력축의 회전방향이 같습니다.